

COMPLETE SOLUTION

TRAMIGO FCT VEHICLE TRACKER

MAINTAIN SECURITY AND RAISE EFFICIENCY

The first affordable tracking solution with embedded SIM and Software access all included. Designed for low valuable vehicles such as for motorbikes and light vehicles.



INSTALL COVERTLY (SEE)









TRACK IMMEDIATELY

- √ Tramigo FCT hardware
- ✓ Built-in connectivity
- ✓ Access to TramigoApp
- Installation Cable
- √12V Immobilizer (Optional)

AFFORDABLE GPS TRACKER FOR LOW VALUABLE VEHICLES

TRAMIGO FCT FEATURES



AFFORDABLE TRACKING SOLUTION



GPS FEATURES



IGNITION DETECTION AND DISABLING



MOTION DETECTION ALARMS



GEO-FENCE ALARMS



Built-in battery










SOFTWARE SUPPORT

Tramigo offers software solutions which allows you to monitor your vehicles at your control center or from your mobile devices:

TRAMIGOAPP

TramigoApp is an easy but secure way to track and monitor your vehicles anytime and anywhere. TramigoApp allows you to monitor and track your vehicles, staff, or family directly on your phone. Additional features includes trip reports, usage history reporting, geofence and setting alarms. Available for free on App Store and Google Play.

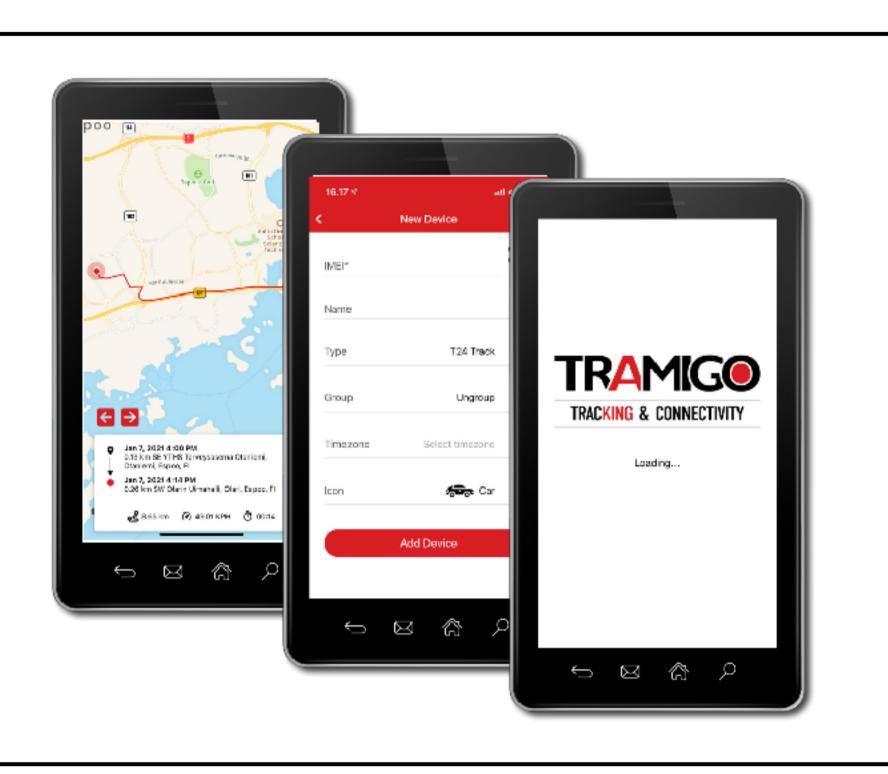



TRAMIGOCLOUD

TramigoCloud allows you to track your fleet behind a secure web login and puts a full control center within your reach wherever you go. With constant centralised updates the latest features are always immediately available to all of our demanding customers. Tramigo Cloud is recommended for fleet management

TECHNICAL DATA

Dimension	78(L) x40(W)x15(H) mm
Network	GSM/GPRS
Frequency	850/900/1800/1900 MHz
GPS chipset	MTK high sensitivity
GPS channel Tracking sensitivity	-165dBm
Location accuracy	<10 meters CEP
Time To First Fix(open sky)	Cold status <35s Hot status <1s
Working voltage	9-36VDC or 9-90VDC
GPRS Protocol	Class12, TCP/IP
Operating temp.	-20°C to +70°C
Back up battery	200mAh /3.7V Li-Polymer battery 5mA~50mA
Standby & Working consumption GSM / GPS antenna	5mA~50mA
GSM / GPS antenna	Built-in
G-Sensor	Support
Geo-fence	Support
Angle change upload location	Support
Ignition status detection	Support
Memory Capacity	1400 positions
Micro USB interface Configuration Mode	Flash firmware/Configuration
Power interface	PC – USB/GPRS /SMS
Micro USB interface Configuration Mode	4 PIN(Power/ACC/Relay)





